

オイルレススライドプレート

銅系粉末焼結タイプ
板厚20mm



SO#220





SOX





●W = 28~75




●W = 100以上

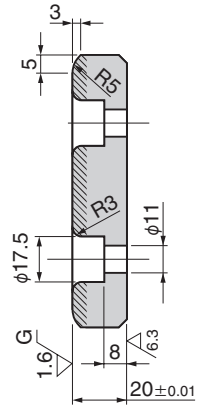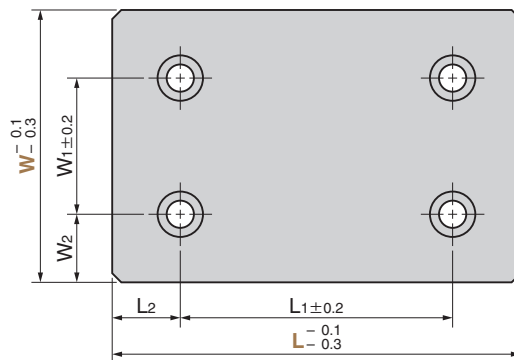

SOXT (2穴タイプ)

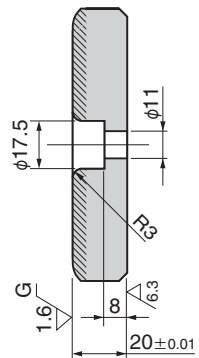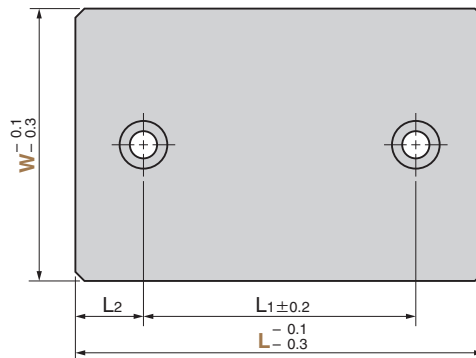

●スライド方向



材質 銅系粉末焼結 (SO#220)
///// 部焼結層
厚さ1.2mm 以上
SS400 (ベースプレート)

使用範囲

給油条件	環境条件	許容最高面圧 P N/mm ²	許容最高速度 V m/min	許容最高 PV 値 N/mm ² · m/min	使用温度範囲 ℃
無給油	大気中	50	30	100	-40 ~ +120
定期給油 (脂)		75	60	150	

物性

比重	硬さ HRM	圧縮強度 N/mm ² (0.2%耐力)	含油率 %
6.2±0.3	70 ~ 90	200 ~ 250	18 以上

W ₁	W ₂	L ₁	L ₂	Catalog No.	W	L	
						SOX	SOXT
		45	15			75	
		50			28	100	
		100	25			150	
		45	15			75	
		50			38	100	
		75	25			125	
		100				150	
		45	15			75	
		50				100	
		75	25		48	125	
—	—	100		SOX		150	—
			50			200	
		45	15			75	
		50			58	100	
		100				150	
		25				75	
		50				100	
		75				125	
		100			75	150	
		150	25			200	
		100				250	
		50				100	100
		75				125	125
50	25	100			100	150	150
		150				200	200
		200				250	250
			50			300	300
		75		SOX		125	125
		100		SOXT		150	150
50	37.5	150	25		125	200	200
		200				250	250
			50			300	—
		100				150	150
100	25	150	25		150	200	200
		200				250	250

* W₁・W₂ は SOX (W = 100 以上) のみの寸法です。

 Order	Catalog No.	W	—	L
	SOX	28	—	75
	SOXT	100	—	100

■ 特注品のご相談・ご注文も承ります。